


ESD Safe Plastic Tweezers

- ESD safe, conductive, Chemically resistance
- Conductive Vestamid reinforced by 25% fiberglass
- Din 53482 $10^3\text{ohm} \times \text{cm}$
- Temperature resistant up to 175c
- Good rigidity and good resistance against acids
- Non magetic, Lilicone and Amine free
- Very precise, when pressure is applied during working, the tips don't open

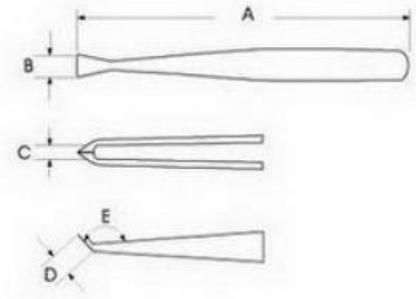

702A

A 4 1/2" 115mm, B 0.08" 2.0mm, C 0.04" 1.0mm



702A

A 4 1/2" 115mm, B 0.02" 0.5mm, C 0.025" 0.6mm



707

A 4 1/2" 115mm, B 0.02" 0.5mm, C 0.045" 1.2mm



707A

A 4 1/2" 115mm, B 0.025" 0.6mm, C 0.04" 1.0mm



708

A 4 1/2" 115mm, B 0.02" 0.5mm, C 0.04" 1.0mm, D 0.035 9.0mm E45°



709

A 4 1/2" 115mm, B 0.13" 3.3mm, C 0.02" 0.5mm



710

A 4 1/2" 115mm, B 0.28" 7.2mm, C 0.02" 0.5mm

