3MTM Static Shielding Bag SCC 1500

Static Shielding Bag ~ Metal-Out

3M Metal-out Static Shielding Bags SCC 1500 are approved by major computer, electronics, and disk drive manufacturers for use worldwide. Our transparent, metallized static shield bag structure provides a static safe environment for sensitive electronic devices. Provides low charge retention and rapid static decay. Bags are lot coded for QC traceability.

Standards

Meets the requirements of MIL-PRF-81705 Type III, EIA 541, EIA 625, MIL-HDBK-263, MIL-STD-1686, EOS/ESD Standards, and charge retention standards.

Specifications

Electrical Properties: Typical Values

Surface Resistivity / Resistance ASTM D257 or ANSI/ESD STM11.11 $>10^5 < 10^{12}$ ohms/square or $>10^4 < 10^{11}$ ohms Interior <10⁵ < 10⁴ ohms ohms/square or Exterior

Metal 100 ohms

Static Shielding < 30 volts MIL-PRF-81705, EIA 541

Static Shielding < 10 nJ**EOS/ESD S11.31** Static Decay < 0.05 seconds MIL-PRF-81705.

FTMS 101 MTH 4046

Charge Retention < 100 volts

Physical Properties:

Tensile Strength >20 lbs **ASTM D 882** Seam Strength Pass MIL-PRF-81705

Light Transmission 40 % Tobias

Heat Sealing Conditions

Temperature 250 F - 375 F Time 0.5 - 3.5 seconds Pressure 30 - 70 PSI

Thickness 3.1 mils 3M 008 Outgassing Pass ASTM E595

Non-corrosive Pass FTMS 101 MTH 3005



ABRASION RESISTANT

COATING

Material Structure

3M Static Shielding Bags SCC 1500 flat and ZipTop are manufactured using a proprietary top coating. The top coating and metal layer provide low

charge retention and Faraday Effect shielding of an Electrostatic

Discharge (ESD) with the associated electrostatic fields. Polyester dielectric stops the current from ESD.

Tribocharging is minimized by the specially processed polyethylene.

ALUMINUM SHIELD POLYESTER

STATIC DISSIPATIVE

POLYETHYLENE

See 3M Data Sheets for these related items:

3M™ Static Warning Labels

3M™ Heat Sealer

СТ D A T R О D U Α

SCC 1500 Static Shielding Bag METAL-OUT

PRODUCT STATIC SHIELDING BAG, OPEN TOP AND ZIPTOP

ITEM NUMBER 150(W")(L")

DATASHEET 1101-B

3M Flectronic Solutions Division 6801 River Place Blvd.

Austin, TX 78726-9000 US and Canada: 866-722-3736

Fax: 866-722-3735

Intl: 919-718-0000: Fax: 919-774-8174

email: 3Mstaticinfo@mmm.com: www.3M.com/static

3M is a trademark of 3M Company.

@ 2008

All other trademarks herein are the property


of their respective owners.



3MTM Static Shielding Bag SCC 1500

Open Top Static Shielding Bag ~ Metal-Out

W"x L"	P/N	W"x L" P/N	W"x L" P/N
3 x 5	15035	8 x 10 150810	12 x 16 1501216
4 x 6	15046	8 x 12 150812	12 x 18 1501218
5 x 8	15058	9 x 12 150912	14 x 18 1501418
6 x 8	15068	10 x 12 1501012	15 x 18 1501518
6 x 10	150610	10 x 14 1501014	16 x 24 1501624
6 x 30	150630	10 x 24 1501024	18 x 18 1501818
7 x 15	150715	11 x 15 1501115	18 x 24 1501824

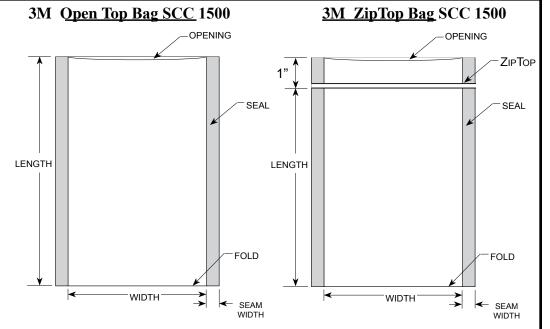

3M ZipTop Bag SCC 1500

Recloseable Static Shielding Bag ~ Metal-Out

W"x L"	P/N	W" x L'	' P/N	W" x L" P/N
3 x 5	150Z35	5 x 8	150Z58	8 x 10 150Z810
4 x 4	150Z44	6 x 8	150Z68	10 x 12 150Z1012
4 x 6	150Z46	6 x 10	150Z610	12 x 18 150Z1218

- All standard sizes in-stock/same day shipment.
- Width is measured from inside seam to inside seam.
- Length is measured from the top edge to the bottom fold.
- Opening is in the "width" dimension.
- Custom bag sizes, custom printing, and custom hot stamping are available.
- Most sizes are packed 100 per case.
 Small sizes are packed 1000 or 500 per case.

PRODUCT DATA SHEET

SCC 1500 Static Shielding Bag METAL-OUT

PRODUCT

STATIC SHIELDING BAG, OPEN TOP AND ZIPTOP

ITEM NUMBER 150(W")(L")

DATASHEET

1101-в

3M Electronic Solutions Division 6801 River Place Blvd. Austin. TX 78726-9000

US and Canada: **866-722-3736**

Fax: 866-722-3735

Intl: 919-718-0000; Fax: 919-774-8174

email: 3Mstaticinfo@mmm.com; www.3M.com/static

3M is a trademark of 3M Company.

© 2008

All other trademarks herein are the property of their respective owners.

